

Wakefield, Que.
JOX 3G0
June 26, 1978

Mr. A. Kuens
R. R. #3
Wakefield, Que.

Dear Mr. Kuens:


This is to advise you that we are now ready to proceed with the plastering portion of our squash court construction. In confirmation of our recent discussions you agree to provide the work necessary to complete the three coat plastering according to the specifications we gave you some time ago, but deleting the mesh, for a total sum of \$2,500.00 providing we supply all the materials. Further, you agree to return to the building six months after it is opened for play to repair any cracks that may have appeared during that time.

Further, I must re-emphasize the necessity of having the plastering applied so that the finished dimensions inside the courts are 21'-0" x 32'-0" with the finish coat as smooth and free from variations as possible. Since the concrete slab is not yet poured, I suggest that you fix the plaster line from the top of the 16 foot high concrete block wall. The front wall will therefore be located 4" down and the back wall 8'-4" down and the sides sloping in between.

With your excellent reputation we certainly anticipate a first-class job.

If you find the above correct, please sign one copy and return it to me and I will order the materials so that work can begin immediately.

Yours truly,

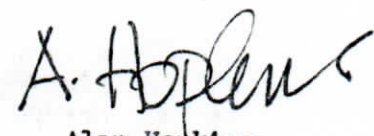

Alan Hopkins
President
Squash Cascades

AH/mh



Cheque #34